



KLINGSPOR


Schleiftechnologie
Abrasive Technology

Information

Technical Information about Quick Change Disc QMC 412

Technical Details:

Grain:	Aluminium oxide
Coating:	Close
Bonding:	Resin over resin
Backing:	Y-Polyester (up to P240) X-cotton (P320)
Grit sizes:	P36 – 180, 240, 320
Disc diameter:	25, 38, 50, 76 mm
Others:	Quick Change Disc with Metal-locking system, to be used with the appropriate backing pad QMC 555

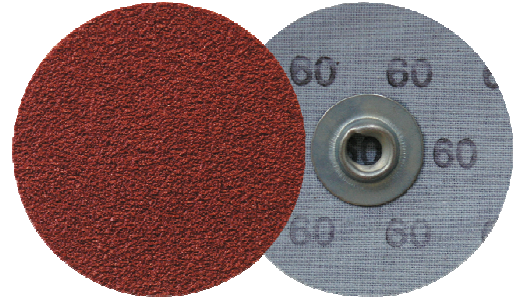

Information about applications:

Material:	steel, stainless steel, non-ferrous metals
Application:	rough grinding (for example removing of small weldings or weld spatters) up to finish grinding of small surfaces
Machine:	„Winkelstabschleifer“, flexible shaft, straight grinder

Market segments:

Mould construction, modelbuilding, automotive, engine building, machine construction, tool manufacturing, aerospace

Product properties:

Universal but also high efficient disc for working on small, difficult to access areas on workpieces out of all kinds of metal. Because of the big grit range suited for rough grinding as well as for finishing. Safe and quick mounting of the discs with a metal locking thread on the appropriate back-up pad QMC 555.