

PONTETS de levage A SOUDER

RÉF. 5018

Acier C22


Finition standard : grenailé
Coefficient de sécurité 1/5

**NORME
NF- EN 10083 1, 2 & 3**

CODE	A	B	C	D	F	G
CMU (kg)	200	500	1000	2000	4000	6000
B (mm)	30	40	50	60	70	80
C (mm)	75	100	125	150	175	200
D (mm)	3	4	5	6	7	8
E (mm)	20	24	27	30	33	36
F (mm)	16	18	21	23	26	29
R (mm)	22	28	35	42	49	56

Codes A à G

de 0,2 à 6T

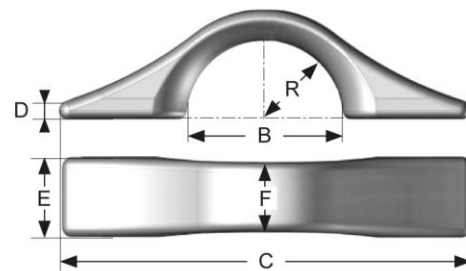

OPTION INOX (codes A, B C D, F, G)

GRAND MODÈLE

Acier C22

Finition standard : grenailé
Coefficient de sécurité 1/5

**NORME
NF- EN 10083 1, 2 & 3**

CODE	K	L	M
CMU (kg)	5000	10000	18000
Ø A (mm)	25	35	45
B (mm)	35	40	50
C (mm)	112	140	180
D (mm)	252	300	360
E (mm)	16	20	25
F (mm)	60	70	80
H (mm)	20	25	35

GRAND MODÈLE

de 5 à 18T

Codes K, L et M

