

RIDOIR – Inox à 2 chapes

RÉF. 5294



réf **5294**
2 chapes soudées




CODE (Réf. 5294)	AA	A	B	C	D	E	F	G	H
Ø tige filetée (mm)	4	5	6	8	10	12	14	16	20
A (mm)	-	11	11	11	13	12	13	15	21
C (mm)	-	19	20	21	24	40	40	40	56
D (mm)	-	6	6	6	8	12	12	14	15
L mini (mm)	110	125	135	145	180	210	260	290	350
L maxi (mm)	160	175	200	210	250	300	410	460	520
rupture indicative (kg)	180	510	720	1080	1320	1800	2700	3900	5400
poids (kg)	0,04	0,06	0,08	0,16	0,27	0,38	0,68	1,03	2,22




RIDOIR – Inox à 1 chape + 1 embout à sertir

RÉF. 5296

Pour système INOX d'architecture



réf **5296** 1 chape + 1 embout à sertir

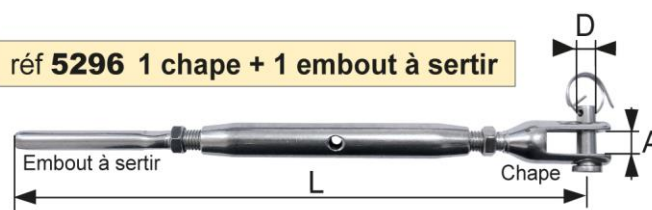

CODE (Réf. 5296)	A	B	C	D	E	F	G	H
Ø tige filetée (mm)	5	6	8	10	12	14	16	20
pour câble Ø (mm)	2,5	3	4	5	6	7	8	10
E = Ø perçage (mm)	2,7	3,2	4,2	5,2	6,2	7,2	8,2	10,5
A / D (mm)	7 / 5	6 / 5	8 / 7	10 / 8	12 / 10	14 / 12	16 / 14	18 / 14
L mini / maxi (mm)	155 / 215	185 / 230	210 / 275	235 / 325	320 / 435	360 / 515	415 / 575	480 / 600
rupture indicative (kg)	510	720	1080	1320	1800	2700	3900	5400
poids (kg)	0,05	0,08	0,13	0,23	0,48	0,62	1,12	2,20

