


# “DUPLA”

- Liaison montant / marche par triple expansion et sertissage.
- Articulations en fonte d'aluminium.



Sangle de sécurité – largeur 3 cm

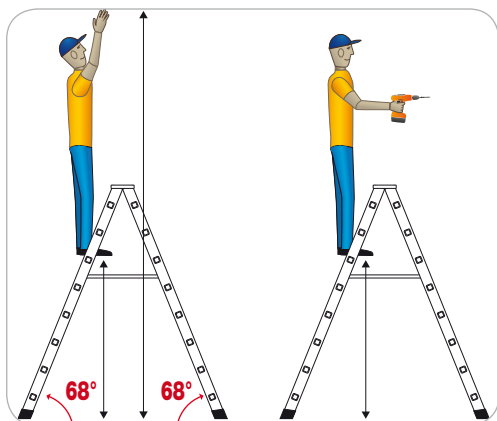

Position correcte de travail

Réf.	Nombre de marches	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m <sup>3</sup> )	
D-5	6	130	113	230	50,0	141	7,8	0,11	8028406002024
D-6	7	154	125	254	53,5	166	9,0	0,14	8028406002031
D-7	8	176	144	276	56,0	190	10,4	0,16	8028406002048
D-8	9	199	169	299	59,5	215	11,8	0,20	8028406002055
D-9	10	223	184	323	62,0	241	13,6	0,23	8028406002062
D-10	11	249	197	349	65,5	265	14,8	0,27	8028406002079
D-12	13	297	220	397	72,0	315	17,8	0,35	8028406002086



Produits livrés emballés sous film PLV et notice



150 kg  
MAX



EN131  
EUROPEAN NORM



MISE A JOUR AVEC LA NOUVELLE NORME: 01/2018

15,5 cm



85 mm  
Marches en aluminium de 85 mm de profondeur, striées antidérapantes

Patin haute sécurité hauteur 5 cm

