


SK OPEN TYPE 3.2/4.0/4.8

For installation information please refer to the tooling overview and manuals on our website www.scell-it.com
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Pro informace ohledně montáže navštivte naše webové stránky nebo nahlédněte do manuálu k nářadí.




SK3.2-4.8FICHE

ENGLISH	FRANÇAIS	DEUTSCH	CZECH
Mandrel : Steel	Tige : Acier	Dorn : Stahl	trn : Ocel
Body : Steel	Corps : Acier	Körper : Stahl	dřík : Ocel
Countersunk head	Tête fraisée à 120°	Senkkopf	zapuštěná hlava

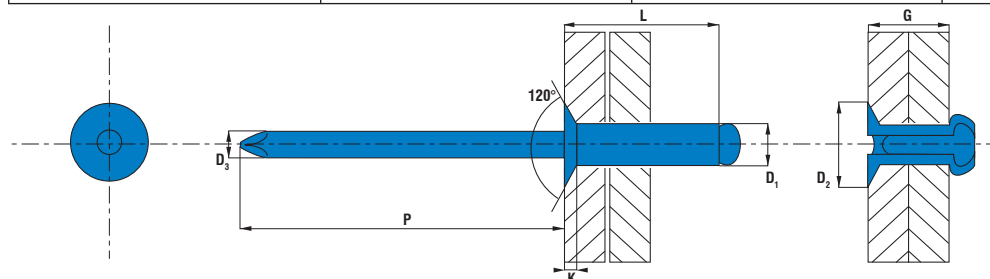

PART NO/REF	D ₁	L	D ₂	K	D ₃	P	G
	Ø (mm)	(mm)+1.0 / -0.2	Ø (mm)	(mm)	Ø (mm)	mini (mm)	min-max (mm)
SK3206	3.2 +0.08 / -0.10	6.0	6.0 -0.4 / +0.0	0.9 -0.2 / +0.2	2.0	27	1.5-3.0
SK3208		8.0					3.0-5.0
SK3210		10.0					5.0-7.0
SK3212		12.0					7.0-9.0
SK4006	4.0 +0.08 / -0.10	6.0	7.5 -0.5 / +0.0	1.0 -0.2 / +0.2	2.5	27	1.5-2.5
SK4008		8.0					2.5-4.5
SK4010		10.0					4.5-6.5
SK4012		12.0					6.5-8.5
SK4016	4.8 +0.08 / -0.10	16.0	9.0 -0.5 / +0.0	1.2 -0.2 / +0.2	2.9	27	10.5-12.5
SK4808		8.0					1.5-4.5
SK4810		10.0					4.0-6.0
SK4812		12.0					6.0-8.0
SK4814		14.0					8.0-10.0
SK4816		16.0					10.0-11.5
SK4820		20.0					13.5-15.5

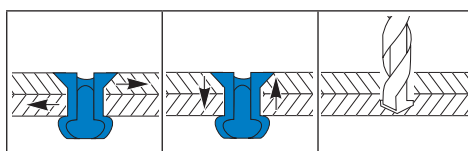

D ₁ (mm)	(N)	(N)	Ø (mm)
3.2	1 100	1 285	3.3
4.0	1 700	2 200	4.1
4.8	2 900	3 100	4.9

UNIT PLANT CERTIFICATES



ISO 9001:2000
TS 16949

Scell-it®
Engineering & Development

© 2009 Blue future Intellectual Properties

Data shown are subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Scell-it representative is at your disposal should you need to confirm latest information.