

CHEVILLE UNIVERSELLE

UNIC



BÉTON
MAÇONNERIE PLEINE
MAÇONNERIE CREUSE
PLÂTRE
PARPAING CREUX




CARACTÉRISTIQUES

Matière : Polypropylène HD

Avantages :

- Excellent verrouillage de forme grâce à la déformation de la cheville.
- Utilisable de -10°C à +60°C

MISE EN ŒUVRE

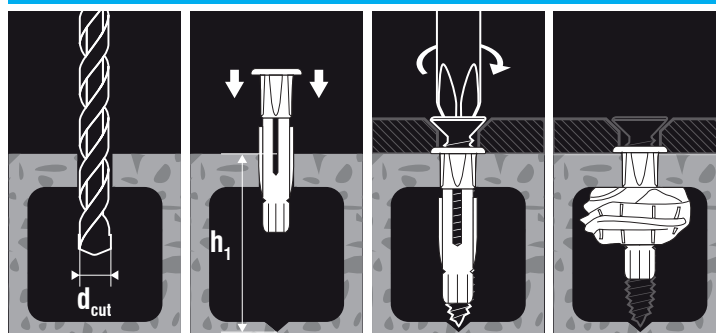


Perçer le trou au
Ø dcut et profondeur
mini h1

Insérer la cheville

Poser l'objet en réalisant l'expansion
de la cheville avec une «vis bois»

DIMENSIONS

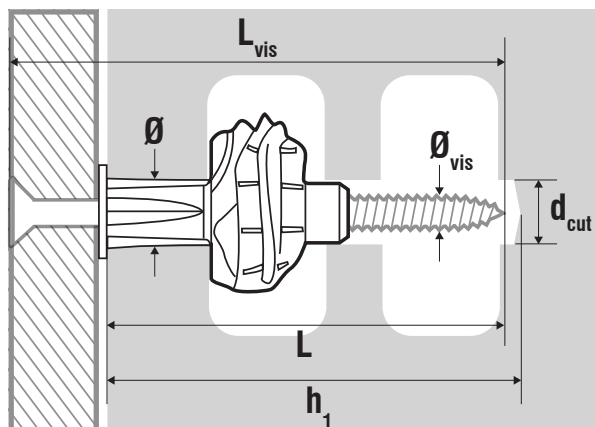

Ø	L	τ	h ₁	L _{vis}	Ø _{vis}	Référence
Diamètre cheville	Longueur mm	Ø perçage mm	Prof perçage mm	Longueur vis min. mm	Diamètre vis min-max mm	
5	30	5	40	35	3.0-4.0	UNIC0530
6	37	6	50	45	4.0-4.5	UNIC0637
	50	6	60	55	4.0-4.5	UNIC0650
7	30	7	40	40	4.0-4.5	UNIC0730
8	50	8	60	55	5.0-6.0	UNIC0850
10	60	10	70	65	6.0-7.0	UNIC1060
12	70	12	80	75	7.0-8.0	UNIC1270

UNIVERSAL PLUG




CONCRETE
SOLID BRICK
HOLLOW BRICK
DRYWALL
CONCRETE BLOCKS




FEATURES

Material: HD Polypropylen

Advantages:

- Excellent locking performance thanks to the deformation of the plug.
- Excellent behavior from -10 °C to + 60 °C

INSTALLATION

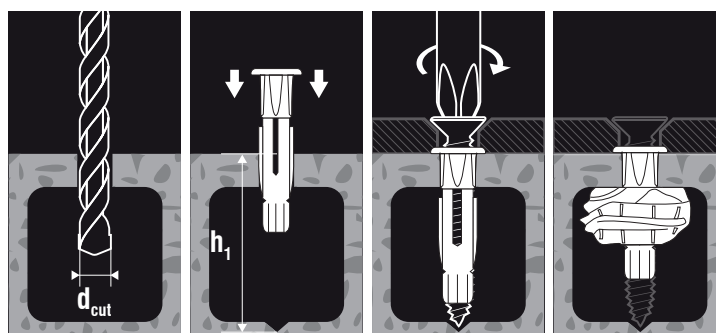


Drill the hole at Ø dcut and depth mini h1

Insert the plug

Set the fixture in expanding the plug with a «wood screw»

DIMENSIONS & APPLICATION DATAS

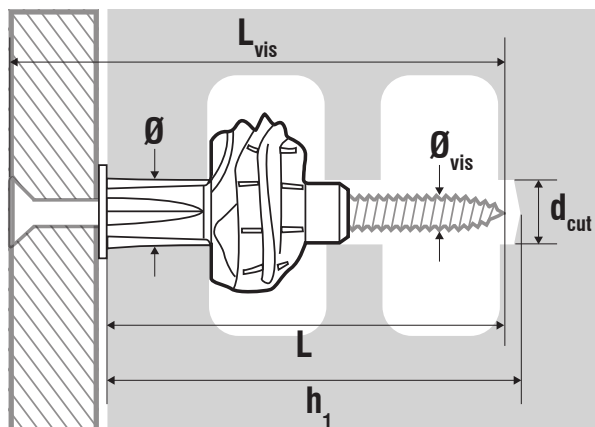

Ø	L		h ₁	L _{vis}	Ø _{vis}	Reference
Anchor diameter	Length mm	Ø drill mm	Drill depth mm	Screw length min. mm	Screw diameter min-max mm	
5	30	5	40	35	3.0-4.0	UNIC0530
6	37	6	50	45	4.0-4.5	UNIC0637
	50	6	60	55	4.0-4.5	UNIC0650
7	30	7	40	40	4.0-4.5	UNIC0730
8	50	8	60	55	5.0-6.0	UNIC0850
10	60	10	70	65	6.0-7.0	UNIC1060
12	70	12	80	75	7.0-8.0	UNIC1270