

Good. Safe. Yellow.

Klingspor Fibre disc

FS 966 ACT

Klingspor Schleifsysteme GmbH & Co. KG


Hüttenstraße 36 · 35708 Haiger · Germany

Fon +49 (0) 2773 922-0 · Fax +49 (0) 2773 922-186

sales@klingspor.de · www.klingspor.de



FS 966 ACT

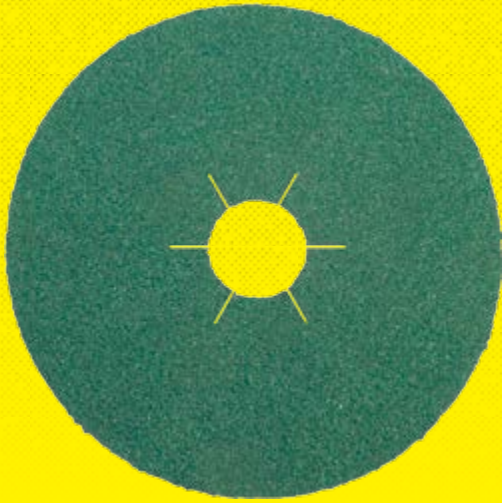

Grit sizes

12	16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	
		✓		✓	✓	✓	✓	✓		✓																

Structure

Grit	ceramic aluminium oxide
Coating	close
Bonding	resin
Backing	vulcanized fibre
Production width	
Other	multibond, ACT
Delivery form	fibre disc (30=star shaped hole)

Application

Material	stainless steel, high alloyed steel
Application	grinding of welding seams, edges and surfaces with suitable backing pad
Machines	angle grinder

Market segment

Metal processing in industry and trade in general, rough until finishing of steel and non-ferrous metal parts with an angle grinder

Product utility

High performance disc with tremendous stock removal and an impressive service life due to self-sharpening ceramic grain for heavy grinding applications. Improved grain adhesion and increased service life due to recipe improvements and Advanced Coating Technology (ACT). Additional multibond for cool grinding. Optimal grinding results and efficient stock removal with the useage of our hard backing pad (ST 358 A).