


EMERILLON **Grand œil**

RÉF. **5172**

Acier estampé, zingué - Coefficient de sécurité 1/5

CODE	A	B	C	D	E	F	G
CMU en kg	350	600	1000	1750	2500	3300	4000
d en mm	10	12	16	19	20	22	25
A en mm	23	32	37	45	50	53	58
B en mm	25	29	35	37	42	47	54
C en mm	25	32	36	39	45	50	57
E en mm	10	12	15	18	20	22	25
H en mm	90	126	140	162	183	200	222
L en mm	110	152	170	196	220	240	270
Poids en kg	0,25	0,47	0,7	0,96	1,4	2	2,93

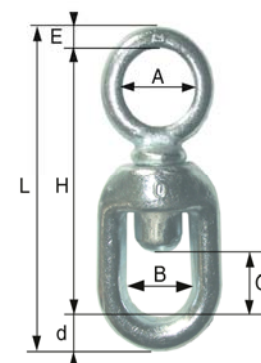

EMERILLON à chape **Haute résistance**

RÉF. **5173**

Acier forgé Haute Résistance

Coefficient de sécurité 1/5



CODE	A	B	C	D	E	F	G	H	J	K
CMU en kg	390	570	1020	1600	2400	3300	4500	5700	8200	20500
diam D en mm	6	8	10	13	16	19	22	25	32	38
B en mm	17	21	24	33	40	44	52	59	68	98
C en mm	19	25	32	38	44	51	57	64	79	102
K en mm	12	13	16	19	24	29	30	44	52	73
N en mm	22	22	27	33	38	44	52	71	71	113
P en mm	6	8	10	13	16	19	22	29	35	57
R en mm	67	75	92	114	135	154	178	217	248	374
poids en kg	0,1	0,15	0,3	0,61	1,12	1,76	2,66	4,46	7,14	24,8

